

Pinch Valves

are ideal for handling abrasive or corrosive slurries, powders or granular substances.



PV Operated by Manual



PVE Pneumatic Actuated




PVE Electric Actuated



PVG



PVEG

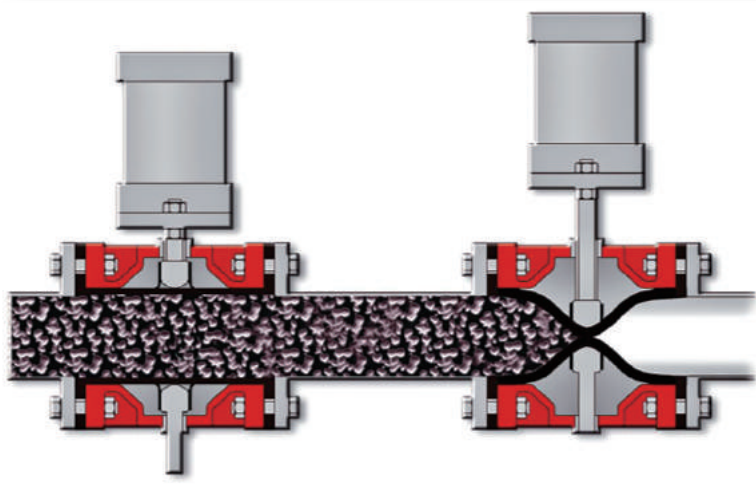

- 100% Tight
- Full Bore
- Only the Sleeve is in Contact with the Medium
- No Jamming or Clogging
- Self-cleaning
- Long Service Intervals
- Excellent Wear Resistance
- Low Maintenance Costs



Chemical



Sewage Disposal



Food & Pharma



Slurry



Pulp

Product specifications

SIZE	Ø 25 mm ~ Ø 1200 mm
TEMP.	-40 °C ~ +160 °C
PRESSURE	0 ~ 100 bar

-The sleeve is a reinforced construction making it the pressure containing part of the valve.

-Valves can be operated by Manual, Pneumatic Actuator, Hydraulic Actuator or Electric Actuator.

-Special sleeve design options, a vacuum sleeve, SensoMate sleeve and others, can be selected.

For special material or design, please contact Li Jin.

